


**Motion-Sensor Spotlight – Item PMB360A**  
**INSTRUCTION GUIDE**

Distributed by:



www.PegasusLighting.com  
 800.392.4818

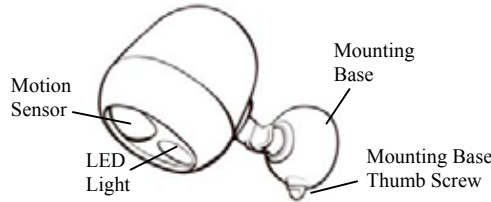

Thank you for purchasing the Mr. Beams™ Motion Sensor Spotlight. We are committed to eliminating darkness by using the latest in light-emitting diodes (LED's). LED's are the most efficient and durable light sources available. We are certain that your Motion Sensor Spotlight will contribute to a safer environment and provide light where you need it at a very reasonable cost.

**ENCLOSED YOU WILL FIND:**

- Motion-Sensor Spotlight
- Mounting Base
- 3 Screws and 2 Anchors

**PMB360A SPOTLIGHT FEATURES**

- Wireless Activated** – Spotlight turns on automatically when motion is detected.
- Auto Shut-Off** – Spotlight shuts off automatically after 30 seconds if no motion is detected.
- Light Sensor** – Wireless Spotlight goes on only in darkness to conserve battery life.
- Fully Adjustable** – Wireless Spotlight can be rotated 360° as well as up and down.


**WARNING**

- Use only new alkaline or lithium D-Cell batteries with 1.5V rating. Do not mix old and new batteries. Install batteries with polarity in correct position.
- Follow battery instructions for proper disposal and cautions.
- Mount fixture securely with included screws, and use anchors if not securing to solid wood or other solid material. **Use the third (long) screw if mounting Spotlight upside down!**

**INSTALLATION INSTRUCTIONS**

**BEFORE YOU MOUNT YOUR SPOTLIGHT**

Illustration 1



1. Remove front cover of Spotlight by rotating counter-clockwise as shown in **Illustration 1**. Pull face out from cup to reveal controls and battery holder. (**Illustration 2**)

Illustration 2



Illustration 3



2. Insert 3 D-Cell Batteries into Spotlight as shown in **Illustration 3**. Attach battery door by matching the tabs to the rectangular holes and then push down front.

Illustration 4



3. Match arrows then turn cover clock-wise (**Illustration 4**).

**NOTE:** Please use only new alkaline or lithium D-Cell batteries with 1.5V rating. Do not mix old and new batteries. Install batteries with polarity in correct position as shown. **Spotlight only goes on in complete darkness! Test in a dark room or drawer. When your Spotlight will not turn off, that means it is time to replace batteries.**

**MOUNTING YOUR SPOTLIGHT**



Illustration 5a




Illustration 5b



Illustration 6




Illustration 7



Illustration 8



Illustration 9



Illustration 10

Determine location for mounting Spotlight.  
**NOTE:** FOR BEST PERFORMANCE, SPOTLIGHT SHOULD BE POSITIONED SO MOTION SENSOR IS ON TOP AND LIGHT IS ON BOTTOM.

**For easiest installation:**

- Remove the base from the stem by turning the thumbscrew located on the base (**Illustration 5a**).
- Drive the long screw through the hole in the center of the base and into the mounting surface (**Illustration 5b**).

**A second mounting option** is to attach Mounting Base using two screws as shown in **Illustration 6**. Slide Mounting Base down so screws are securely held by track. If using anchors, use 3/16" drill bit to drill holes and insert anchors. Drive screws into anchors so that screw head protrudes 1/8" from surface (the height of the screw head). If using screws only, use 1/8" drill bit to drill holes and insert screws so that screw head protrudes 1/8" from surface (the height of the screw head). Use template (above) to mark two holes for anchors and/or screws (included) as shown in **Illustration 7**. Make sure that screws are precise distance from each other as configured in template (2-1/8" apart).

**NOTE:** Spotlight can be rotated 360°. We recommend mounting the screws parallel to the ground if mounting on a vertical surface. To attach Spotlight to Mounting Base, insert the stem of the Spotlight and tighten thumb screw (**Illustration 8**). To adjust Spotlight direction, loosen smaller thumbscrew on Mounting Base and rotate Flood Light to proper direction as shown in **Illustration 9**. Tighten thumbscrew. Loosen larger thumbscrew that connects Spotlight Head to Mounting Base and adjust Spotlight Head to proper direction as shown in **Illustration 10**. Tighten thumbscrew.

**LIMITED WARRANTY**

The product you have purchased is guaranteed against defects in workmanship and materials for the period stated on the package. Warranties implied by law are subject to the same time period limitation. Some states do not allow limitations on how long an implied warranty lasts, so this time limitation may not apply to you. If the product fails due to a manufacturing defect during normal use, return the product and dated sales receipt to the store where purchased for replacement OR send the product and the dated sales receipt to the address above. **Not Covered** – Batteries are not covered by this warranty. Repair service, adjustment and calibration due to misuse, abuse or negligence are not covered by this warranty. Unauthorized service or modification to this product or of any furnished components will void this warranty in its entirety. This warranty does not include reimbursement for inconvenience, installation, set-up time, loss of use, postage, unauthorized service, or other products used in conjunction with, but are not supplied by, Wireless Environment. **This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.**