

# Installation Instructions

\*\*\*URGENT: READ PRIOR TO ATTEMPTING INSTALLATION\*\*\*

## UNDER CABINET - NM-127/128/240/241/250/251/252/253/254

**NORALIGHTING.**

**ALWAYS TURN OFF MAIN POWER BEFORE INSTALLATION**

### SURFACE INSTALLATION

1. Pry out shell from housing. Fasten housing to surface with screws provided.
2. Connect leads to power source and push excess wire leads to hole.
3. Insert shell into housing by pressing side paddle clips.

### RECESSED INSTALLATION

**WARNING: Always maintain a minimum of 1/2" distance from adjacent combustible materials.**

1. Pry out shell from housing. Keep housing for future use.
2. Cut out hole in the surface according to recommended diameter.
3. Connect leads to power source.
4. Insert shell into the surface hole by pressing side paddle clips.

### CHANGING BULB: MAKE SURE FIXTURE IS COOL

**NM-127/240:** To open, turn trim clockwise. To close, turn trim counterclockwise.

**NM-128/241:** To open, depress springs to release lens. To close, push lens back into place.




**NM-250:** Pull shell from housing. To open, hold back of shell and turn lens cover counterclockwise then turn lens counterclockwise. To close, turn lens clockwise, replace lens cover by turning it clockwise. Replace back shell to housing by depressing paddle clips on the side (see FIG. A).

**NM-251/252/253:** To open, pry out lens assembly. To close, push lens assembly back into place (see FIG. B).

**NM-254:** Hold edge of trim assembly, turn and pull out shell from housing. To open, hold the shell and pull trim. To close, push trim back and insert shell to housing (see FIG. C).

### Parts Included:

1. Shell (includes Trim and Lens, Reflector, Socket and Bulb, Paddle Clips and 18" Wire Leads).
2. Housing.

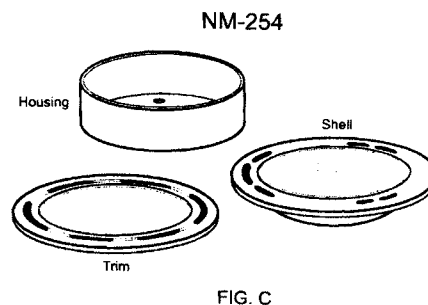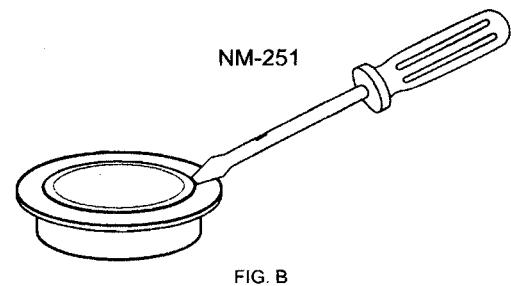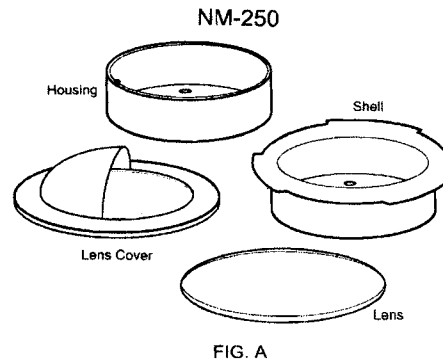

**CAUTION: DO NOT MODIFY OR ALTER ANY PORTION OF THE FIXTURE OR TRIM. ALL COMPONENTS ARE PROVIDED.:**

**NORALIGHTING.**

Distributed by:

**PEGASUS**  
LIGHTING

www.PegasusLighting.com  
800.392.4818