

All-Purpose Motion-Sensor Light – Item PMB720 / 723

INSTRUCTION GUIDE



ALL-PURPOSE LIGHT

Thank you for purchasing the Mr. Beams™ All-Purpose Motion-Sensor Light (AP Light). We are committed to eliminating darkness by using the latest in light-emitting diodes (LED's). LED's are the most efficient and durable light sources available. We are certain your Mr. Beams AP Light will contribute to a safer environment and provide light where you need it at a very reasonable cost.

ENCLOSED YOU WILL FIND:

- All-Purpose Motion-Sensor Light
- Mounting Bracket
- 2 Screws and Double-Sided Tape

PMB720 AP LIGHT FEATURES

Motion Sensor Activated – Your AP Light has a sensitive motion sensor that will activate the LED only when motion is detected. Light shuts off automatically after no motion is detected for 30 seconds.

Light Sensor – Your AP Light goes on only in darkness to conserve battery life.

Mount to Wall Options– Use 2 screws or tape (included) to mount you're AP Light to the wall.

WARNING

- Use only new alkaline or lithium AA-Cell batteries with 1.5V rating. Do not mix old and new batteries. Install batteries with polarity in correct position.
- Follow battery instructions for proper disposal and cautions.
- Light takes approximately 10 seconds to activate once batteries are inserted.
- **Light will only go on in complete darkness.**

INSTALLATION INSTRUCTIONS

BEFORE YOU MOUNT YOUR AP LIGHT:

Illustration 1



Remove Mounting Bracket from back of AP Light. Remove battery door of AP Light by removing 2 thumb screws as shown in **Illustration 1**.

Illustration 2



Insert 4 Fresh AA batteries as shown in **Illustration 2**. Close battery door.

MOUNTING WITH TAPE—INDOOR ONLY:

Illustration 3—(Indoor Use Only)



Attach double-sided tape (included) to back of mounting bracket as shown in **Illustration 3**.


Illustration 4



Attach Mounting Bracket to Wall. Attach AP Light to Mounting Bracket as shown in **Illustration 4**.

MOUNTING WITH SCREWS—INDOOR OR OUTDOOR:

Determine location for mounting AP Light. Drive screws (included) through holes of Mounting Bracket to secure. Attach AP Light as shown in **Illustration 5**.

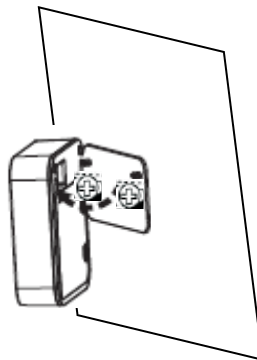

IMPORTANT NOTES:

- Please use only new alkaline or lithium D-Cell batteries with 1.5V rating.
- Do not mix old and new batteries.
- Install batteries with polarity in correct position as shown.
- **All-Purpose Light only goes on in complete darkness! Test in a dark room or drawer.**

LIMITED WARRANTY

The product you have purchased is guaranteed against defects in workmanship and materials for the period stated on the package. Warranties implied by law are subject to the same time period limitation. Some states do not allow limitations on how long an implied warranty lasts, so this time limitation may not apply to you. If the product fails due to a manufacturing defect during normal use, return the product and dated sales receipt to the store where purchased for replacement OR send the product and the dated sales receipt to the address above. **Not Covered** – Batteries are not covered by this warranty. Repair service, adjustment and calibration due to misuse, abuse or negligence are not covered by this warranty. Unauthorized service or modification to this product or of any furnished components will void this warranty in its entirety. This warranty does not include reimbursement for inconvenience, installation, set-up time, loss of use, postage, unauthorized service, or other products used in conjunction with, but are not supplied by, Wireless Environment. **This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.**

Distributed by:



www.PegasusLighting.com
800.392.4818