



**DESCRIPTION**

This undercabinet diode unit features with 28 quarter (.25W) watt led that can be adjusted with push button switch to full or half power.

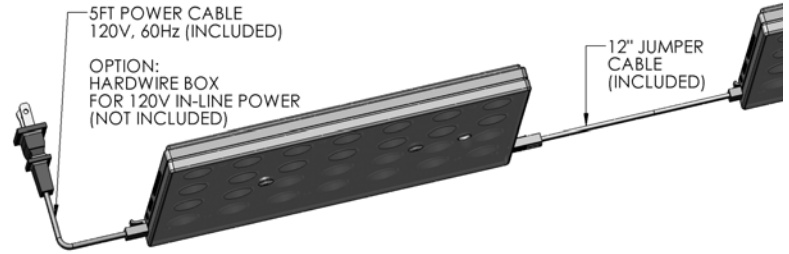

**CONSTRUCTION**

High gloss ABS injection molded plastic housing. Frosted ABS injection molded diffuser. 28Diode .25 watt white LEDs. Unit can be adhesive or screw mounted. Has 3-position switch for full or half light output. Uses proprietary power connectors.



**FINISH**

Polished white housing with clear frosted diffuser.

**DIFFUSER**


Diffuser is 1/8" thick ABS material. Frosted texture on surface, clear over LEDs.

**ELECTRICAL**

Circuit board contains 28 .25 watt white LEDs  
 3500K, 60° beam spread  
 One .25 watt blue LED for switch backlight  
 LED AC/DC converter integrated PC board  
 Must use proprietary power connectors  
 3-position push switch  
 20 Units (145W) Maximum to Interconnect

Fixture complies with U.L. 153  
 UL listed for dry locations.

120volt, ±10%, 60Hz A.C.

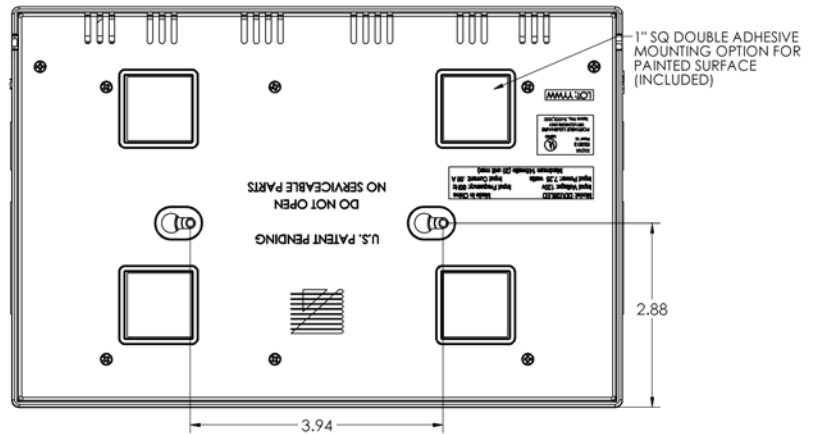

**ACCESSORIES**

60" 18ga SPT-2 Power cable with connector (Included)  
 12" Interconnect Cable (Included)  
 Two #6 screws for mounting to metal or wood (Included)

**Option:**

Four 1" sq adhesive pad for mounting to painted surfaces (Included)  
 Hardwire Box - 120V In-Line Power (Not Included)  
 Model No. XNHB Series

**ORDERING INFORMATION**

Model No.	LED	W	D	H
DDU28WH	28Diode .25 watt	9-1/2"	6-1/4"	5/8"

Distributed by:



www.PegasusLighting.com  
 800.392.4818